



## Features

- Max. tensile strength 300 N, working load 200 N.
- Same hole shape for panel and frame.
- Available in slotted recess or knurled head styles .
- Fastener position indication by stud slot.
- Stud assembly captive in the panel.
- Vibration resistant.
- Grip ranges from 2,0 mm to 4,6 mm.
- Lock and unlock by a quarter turn.
- Typical applications are in electro-mechanical and electronic equipment.
- Quick installation without tools.

## Part no. example


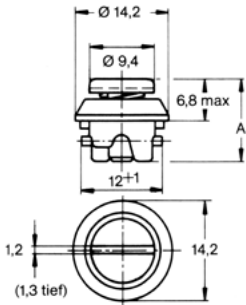

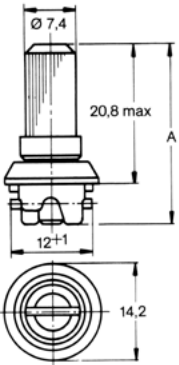
Knurled head for 3,3 mm to 4,6 mm grip range.

### V936 S11 -4 -1 AA

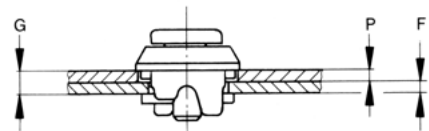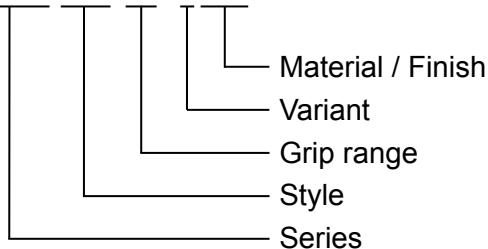

$$G = P + F$$

$$P_{min} = 1,2 \text{ mm}$$

Style	Dimensions	Materials / Finish	A	Grip Range G	°C	Part No.
<b>Slotted Recess Head</b>  		Stud, spiral pin: Steel / zinc-plated, CrVI-free, clear chromate  Compression spring: Stainless steel  Casing: Zinc die casting / zinc-plated, CrVI-free, clear chromate	12,3 <sup>±0,3</sup>	2,0 - 3,2	100	<b>V936S05-3-1AA</b>
			14,8 <sup>±0,3</sup>	3,3 - 4,6	100	<b>V936S05-4-1AA</b>
<b>Knurled Head</b>  		Stud, Casing: Zinc die casting / zinc-plated, CrVI-free, clear chromate  Compression spring: Stainless steel  Spiral pin: Steel / zinc-plated, CrVI-free, clear chromate	26,4 <sup>±0,3</sup>	2,0 - 3,2	100	<b>V936S11-3-1AA</b>
			28,9 <sup>±0,3</sup>	3,3 - 4,6	100	<b>V936S11-4-1AA</b>

