



## Features

- Wide grip range (total thickness G up to 15 mm).
- Suitable for a large range of applications.
- Easy installation with single-hole mounting.
- Either tool-operated (slotted recess head) or hand-operated (fixed wing handle).
- Clockwise locking 3/4 turn maximum.

## Part no. example

Pawl Latches, slotted recess head, with decorative washer.

## V964L 01 -1 -2AG

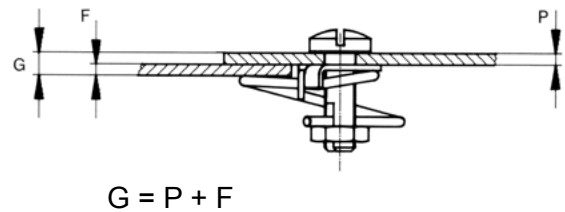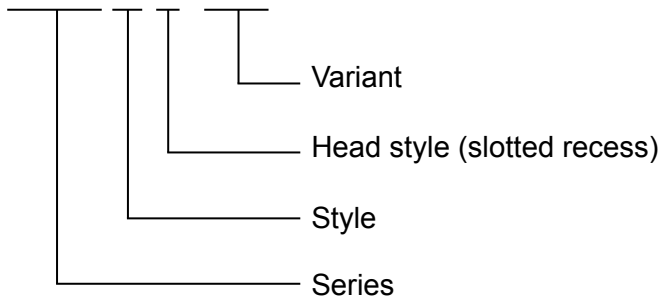

Style	Dimensions	Materials / Finish	°C	Part No.
<p><b>Slotted Recess Head</b></p>		<p>Stud: Steel / zinc-plated CrVI-free, clear passivation</p> <p>Spring: Stainless steel</p>	120	<b>V964L01-1-1AG</b>
<p><b>Slotted Recess Head with Decorative Washer</b></p>	<p>Decorative washer</p>	<p>Stud: Steel / zinc-plated CrVI-free, clear passivation</p> <p>Spring: Stainless steel</p>	120	<b>V964L01-1-2AG</b>
<p><b>Fixed Wing Handle Plastic</b></p>		<p>Stud: Steel / zinc-plated CrVI-free, clear passivation</p> <p>Spring: Stainless steel</p> <p>Wing: Plastic (POM) black</p>	-40 up to +100	<b>V964L01-2-1AG</b>

Installation Dimensions

