


Particular Features:


Generally used for plain/flush mounted, isolated, heavy doors
 Stud versions fitted with M8x14mm threaded stud
 Stainless steel (AISI 304) hinge pin
 270° rotation

Application:

Electric panels, build-in covers

Hinge Rotation Angle



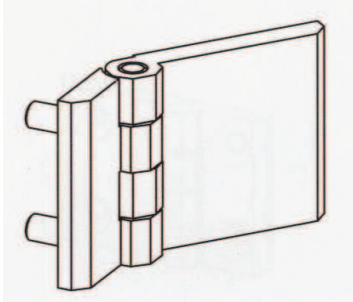Version	Materials / Finish	Part-No.
	Zamak® DIN-EN1774-ZnAl4Cu1 chrome plated (CrVI-free)	HF40ED-T2
	Zamak® DIN-EN1774-ZnAl4Cu1 black coated (CrVI-free)	HF40EH-T2

Dimensions and Hole Preparation

